

The WFC and WFE ranges

Features

- Powerful 3kW output.
- Choice of silver or black finish.
- Variable thermostat, range 5°C to 35°C.
- Manual mode selection (WFC).
- Low fan/high fan/1kW, 2kW, 3kW outputs.
- Fine mesh dust filter.
- Electronic-thermostat control (WFE).
- Dual mode electronic programmer (WFE):
 - Modes: on/off, auto seven day, auto five + two day.
 - Four time periods per block.
 - Manual advance.

Colour/finish

WFC3NB/WFE3TNB: black stove enamelled body with cherry-effect end panels.

WFC3NS/WFE3TNS: satin silver-enamelled body with black-painted end panels.

Construction

- Pressed steel front panel and base.
- Keyhole-mounting slots on rear of product.
- Twin helically wound fully strung open coil elements (2kW + 1kW).
- Low-noise tangential fan.
- Auto reset over temperature cut-out.
- Supplied without cable.

Model WFC3NB




Model WFE3TNS

The WF range provides rapid response with accurate temperature control, making the heaters ideal for commercial use in areas such as shops, offices, restaurants and waiting areas.

Both WFC and WFE models are thermostatically controlled and draw room temperature air through the front panel and blow warm air out of the concealed grille underneath. This sets up a very effective circulation of air in

the room for rapid warm-up and to maintain stable comfort conditions. WFE electronic models provide the additional benefit of fully automatic control over the heat output level.

General and fixing dimensions (mm)

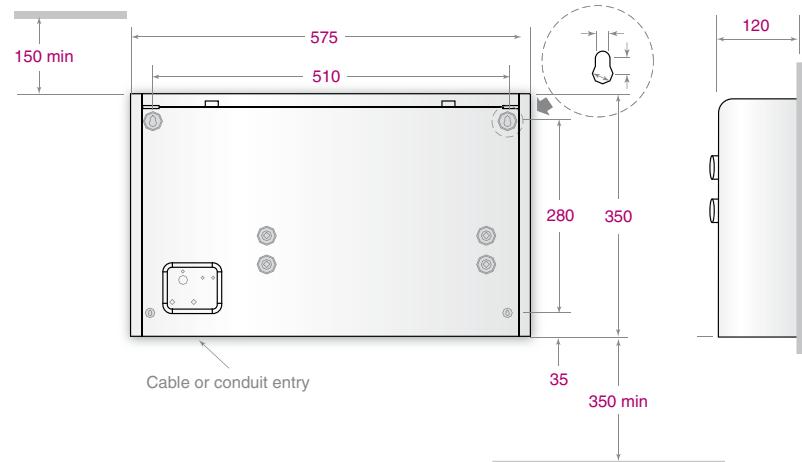

Model	Finish	Loading	Height	Width	Depth	Minimum distance Above	Below	Weight
WFC3NB WFC3NS	Black Silver	3.0kW	350mm	575mm	120mm	150mm	350mm	6.6kg
WFE3TNB WFE3TNS	Black Silver	3.0kW	350mm	575mm	120mm	150mm	350mm	6.6kg