

QUANTUM[®]

heating system
Off-peak Heater

Installation

Floor standing and fixed to wall via wall fixing bracket.

IP Rating

IPX2 - QM050 soon to be IPX4.

Cable Entry Point

Dual entry, both sides bottom right.
No cable supplied.

Thermal Cut-out

Electromechanical.

Elements

Incoloy sheathed.

Construction


High density bonded magnetite energy cells surrounded with microporous silica and calcium silicate slab insulation all enclosed in an attractive case.

Controls

Lot 20 compliant with electronic seven day time and temperature.

Colour

White.

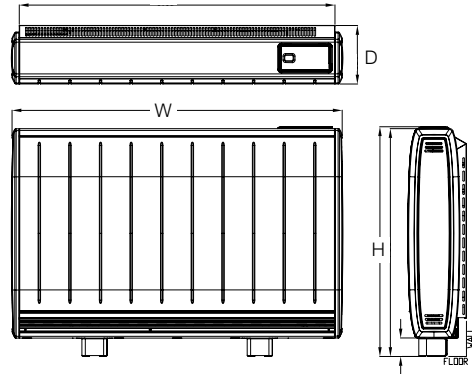

Model	Input (kW)	Output (kW)	Boost (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Installed weight (kg)	Energy pack requirement
QM050	1.1	0.5	0.4	730	580	185	27.2	66	4
QM070	1.56	0.7	0.63	730	703	185	24.8	83	6
QM100	2.2	1.0	0.88	730	865	185	29.4	107	8
QM125	2.76	1.25	1.13	730	1069	185	38	135	10
QM150	3.3	1.5	1.3	730	1069	185	38.6	155	12

A tall feet kit (QFEET) is available to take skirting board clearance from 28mm x 123mm to 28mm x 203mm